


# Wilo ECO RFC

## High Efficiency Circulators

### Wilo ECO RFC

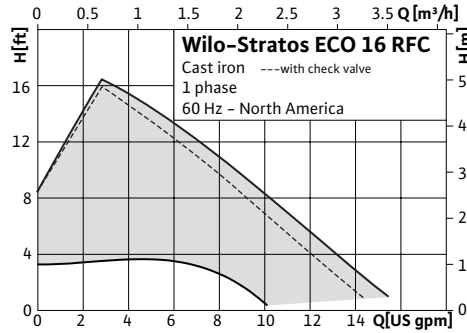

#### Features and Benefits

- Patent-pending 360° Flange rotates to 12/ or 3/9 o'clock positions
- Installable hi-temp check valve included
- ECM technology for energy savings up to 80%
- Max. wattage 59, min. wattage 5.8 (115v)
- Automatically adjusts to system demands
- Flows to 14 USGPM, heads to 16 feet
- No more over-pumped, noisy zones
- Highest starting torque in the industry!

#### Application

- HVAC Applications
- Residential Heating
- Water/glycol concentrations up to 50%
- Geothermal Systems
- Solar Systems

#### Technical Data

- Fluid Temp Range: 60°F to 230°F (15°C to 115 °C)
- Ambient Temp Range: 14°F to 104°F (-10°C to 40 °C)
- Electrical Connection: 1~115
- Max Working Pressure: 145 PSI
- Min. Suction Pressure (122°F): 1.0 PSI
- Min. Suction Pressure (203°F): 4.3 PSI
- Min. Suction Pressure (230°F): 14.0 PSI

### Wilo ECO RFC

| Model                     | Volute    | HP   | Phase | Voltage<br>(± 15%) | Approx Weight<br>(lbs) | Skid Qty | Article Number | List Price<br>USD |
|---------------------------|-----------|------|-------|--------------------|------------------------|----------|----------------|-------------------|
| <b>Stratos ECO 16 RFC</b> | Cast Iron | 1/25 | 1     | 115                | 7                      | 30       | 4145539        | <b>606</b>        |