

# Wilo ECO RFC High Efficiency Circulators



Product Brochure



360° Flange

Installable  
Check Valve!

closure 2  
MAX. PRESSURE  
MAX. TEMPERATURE  
MAX. AMBIENT TEMPERATURE  
MAX. CONDUCTORS  
RUN PUMP DRY  
Class F  
Do not install with  
motor above or  
below pump body  
For indoor use only  
**WARNING:**  
To reduce risk of  
electrical shock see  
instruction manual  
Made by WILO  
in France  
**Stratos ECO 16 RFC**  
Art.-No. 4145539  
WATER CIRCULATING PUMP  
**WILO**




# Wilo ECO RFC

## High-Efficiency Circulators


Applications Include:

- » Heating Systems
- » Water/Glycol up to 50%
- » Solar
- » HVAC Applications
- » Residential Heating
- » Geothermal

WILO ECO RFC




Installable Hi-Temp  
Check Valve!

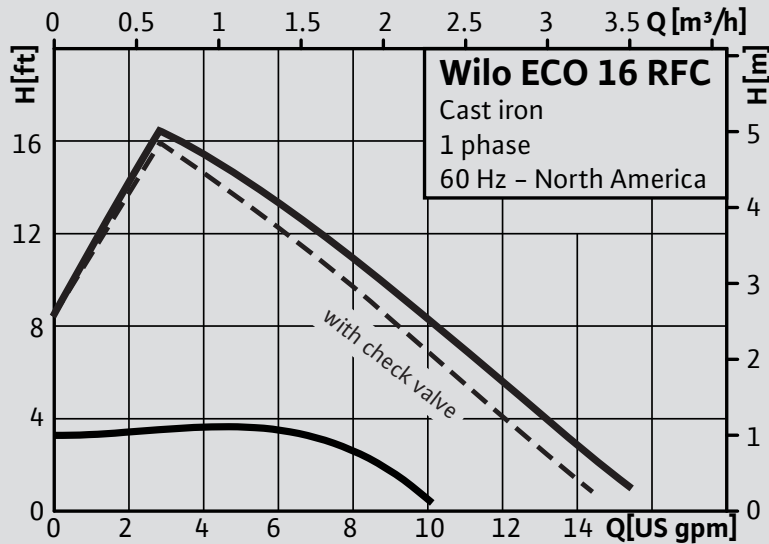

### Up to 80% Energy Savings!\*

\*Compared to an uncontrolled circulator.

- » Patent-pending 360° Flange rotates to 12/6 or 3/9 o'clock positions
- » Heads up to 16 feet
- » Installable hi-temp check valve included
- » No more over-pumped, noisy zones
- » ECM technology for up to 80% energy savings (compared to an uncontrolled circulator)
- » Optional night setback on all models
- » Max. wattage 59, min. wattage 5.8 (115v)
- » De-Blocking/Anti-seizing function
- » Automatically adjusts to system demands
- » Easy wiring quick connectors
- » Cast Iron Volute
- » Easy set-up (set p-v in feet of head via red button)
- » Flows up to 14 USGPM
- » Max. temp 230°F, min. temp 60°F
- » Highest starting torque in the industry!



WILO USA LLC

Toll-Free: 888-945-6872  
Web: [www.wilo-usa.com](http://www.wilo-usa.com)  
Email: [info@wilo-usa.com](mailto:info@wilo-usa.com)

WILO Canada Inc.

Toll-Free: 866-945-6236  
Web: [www.wilo-canada.com](http://www.wilo-canada.com)  
Email: [info@wilo-canada.com](mailto:info@wilo-canada.com)

